



MS11

ADJUSTABLE RANGE, STAINLESS STEEL
MICROWAVE TOUCHLESS ACTUATOR



VIDEO



[Watch the product video](#)

TECHNOLOGY



CERTIFICATIONS



DESCRIPTION

BEA's **MS11** is an aesthetically pleasing, touchless activation device designed to reduce the spread of germs and improve accessibility in healthcare, retail, industrial and commercial settings. The **MS11** has been purpose-built to withstand the extreme rigors of fast-paced and sanitary environments.

The flush-mount **MS11** is a durable stainless steel device utilizing adjustable-range microwave technology.

The **MS11's** illuminated center and audible signaling confirms activation and encourages proper touchless use.

The **MS11** detects moving objects such as a hand, cart or wheelchair and is designed for use in hospitals, pharmacies, clean rooms, food service and other areas needing highly accessible and germ-free activation.



Ideal For Harsh Environments

IP65 rated enclosure capable of use in industrial and extreme wash-down environments

High-Visibility

Illuminated blue center changes to green upon signal reception / activation

Adjustable Detection Zone

Adjustable sensing zone from 2 – 24 inches (pulse or toggle)

Activation Alerts


Adjustable audible alert setting, including silent-mode required for hospitals and other noise-sensitive environments

Adjustable Hold Time

Configurable output hold time of 1 – 30 seconds allowing unique, user-defined device placement

Universally Compatible With Automatic Doors

Compatible with all automatic door control makes and models

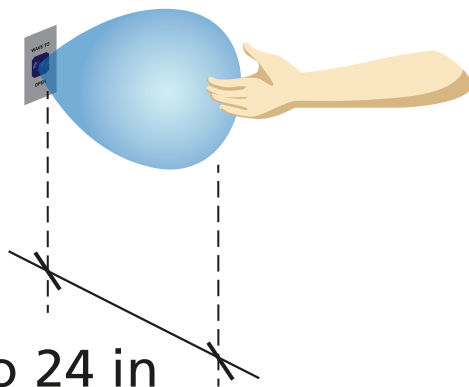


2 to 24 in


APPLICATIONS



Healthcare Environments



Clean Rooms and Sterile Facilities



Washdown Resistant

TECHNICAL SPECIFICATIONS


Technology	Microwave Doppler Radar
Detection Mode	Motion (bidirectional), Toggle or Timed Mode
Sensing Zone **	2 – 24" (adjustable)
Hold Time	1 – 30 s
Alert Settings	
Audible Alert	Silent Mode or Signal Mode
Visual Alert	Blue (Standby) Green (Activation)
Supply Voltage	12 – 24 VAC / VDC or 5 VDC
Current Consumption	< 2.8 W
Temperature Range	-22 – 158 °F
Enclosure Rating	IP65
Relay	1-Form C Solid State Relay 1 A 30 VAC / VDC (max)
Dimensions	
Single Gang	4.5" (H) × 2.75" (W) × 0.98" (T)
Double Gang	4.5" (H) × 4.5" (W) × 0.98" (T)
Jamb	4.5" (H) × 1.68" (W) × 0.98" (T)
Wire Harness Length	12"
Material	Stainless Steel (faceplate) / ABS (center)

** See User's Guide

PRODUCT SERIES



10MS11S
Stainless steel single gang



10MS11J
Stainless steel jamb style



10MS11D
Stainless steel double gang



10RD900
900 MHz Receiver



10TD900TR
900 MHz retrofit transmitter



10ABOXSGSMS
Single gang angled mounting box

EXENCIÓN DE RESPONSABILIDAD La información se proporciona con la condición de que las personas que la reciban tomarán su propia determinación en cuanto a su idoneidad para sus fines antes de su uso. En ningún caso BEA será responsable por daños de cualquier naturaleza que resulten del uso o la dependencia de la información de este documento o de los productos a los que se refiere la información. BEA tiene el derecho sin responsabilidad de cambiar las descripciones y especificaciones en cualquier momento.

WWW.BEASENSORS.COM



BEA AMERICAS / RIDC Park West / 100 Enterprise Drive / Pittsburgh, PA
T 1-800-523-2462 / F 1-888-523-2462 / E info-us@BEAsensors.com

A Halma company